



EURO-HS

The EURO-HS horizontal rotary motion flow wrapper, top feed, allows to realize three-seals bags starting from a film roll - stock. It has been designed to be perfectly integrated in automatic packaging lines, responding to medium and high speed production. Managing software has been purposely designed to minimize operator's intervention during production. Sturdy construction with a stainless-steel frame, the EURO-HS includes a wide range of options make it very flexible. Among these options are : automatic film roll replacement, side gusseting system, fin-seal rollers vacuum device, cold seal pack and several different solutions of infeed conveyors.

Performance up to 300 bpm

Stainless steel frame

Perfect integration into automatic packaging lines

Gusseting system available






Technical Data

Max mechanical speed:	300 bpm
Max. mechanical film unwinding speed:	60mt/min. / 196,8 ft
Roll max width:	400 mm / 15,74" or 600 mm / 23,62"
Roll max external:	Ø 350 mm / 13,78"
Min/max bag length:	40 – 1.000mm (1,57 – 39,37")
No. of long seal rollers:	3 or 4
No. of cross jaws:	2 or 3
Touch screen:	10"
Frame:	AISI 304 stainless steel



Main Options

- Three sealing jaws
- Four long seal rollers
- Remote control device
- Zig-zag or easy opening blades
- Euroslot
- No Product - No Bag
- Vacuum fin-seal rollers
- Cold-seal film pack
- Cooling system for electric cabinet
- Stainless steel legs
- Film roll automatic replacement
- Gussetting system
- Additional heating systems on fin seal
- Empty and double bags rejection systems on the outfeed side
- Printers

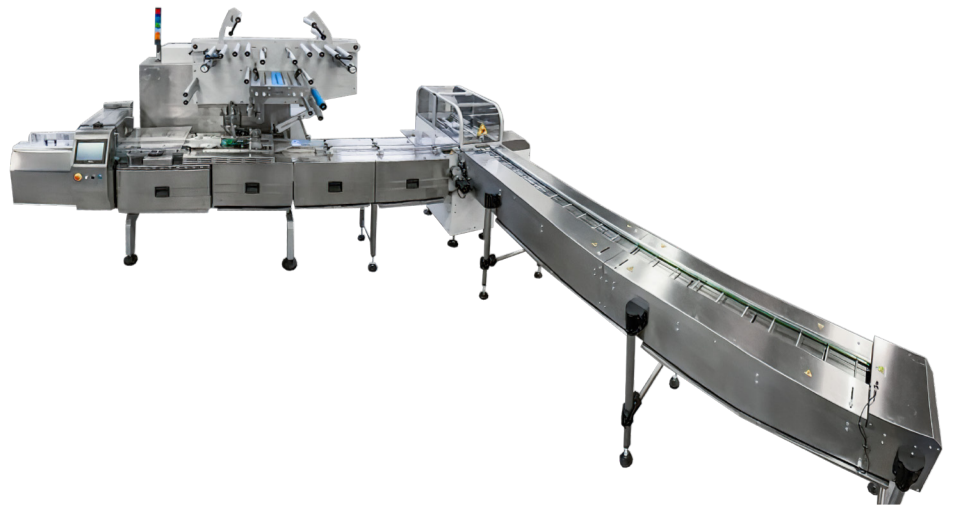

Pictures of packed products are not of promotional nature, but meant to stand as examples of different packaging types. Not all represented products were packed by Sigitaspak s.r.l.

